

# Trimvent® Select S13

Surface mounted slot ventilator



Trimvent® Select S13 Ventilator

Suitable for:



Trimvent Select S13 is a surface mounted plastic slot ventilator that fits over a 13mm slot in a window. It provides an Equivalent Area (EA) of 1700mm<sup>2</sup> or 2700mm<sup>2</sup> and can be fitted with a C13 canopy or GS13 grille.


The S13 is ideal for refurbishment situations using any window material and is available in a variety of colours. Trimvent Select ventilators have been specified and fitted on millions of windows throughout the UK and mainland Europe over the last 20 years.



Trimvent® Select C13 Canopy

## Features and Benefits

- Deflects air up or down, or both
- Unique occupant controllable tilting T-bar
- Rounded unobtrusive shape
- Can be fitted on the sash, frame or overhead section
- For use over 13mm slot
- Based on successful Trimvent® principle
- Sculpted finger recess
- Screw fix or clip fix versions (GS13 clip fix only)
- Patented and registered design
- Available in vent and canopy packs
- Remote control vent available
- Wide range of colours and wood grain finishes available
- When specified correctly complies with Building Regulations

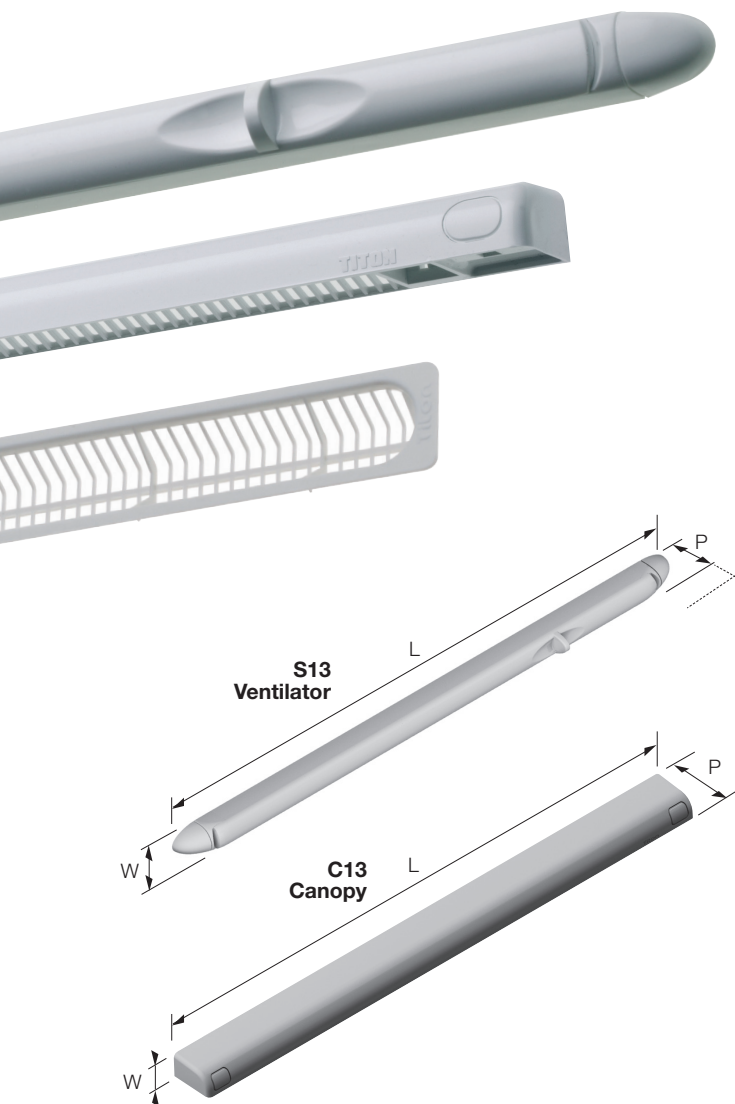

Product	Product Code	(L) Length	(W) Width	(P) Projection Closed-Open	EA (mm <sup>2</sup> )	Free Area (mm <sup>2</sup> )	Slot Detail / Free Area of Slot (mm <sup>2</sup> )
S13 1700EA vent screw fix	TS1131750	265	18.5	20 - 26	1700	2212	
C13 267 canopy screw fix	TS2132020	267	17	24	1700	2351	
S13 1700EA vent & C13 canopy screw fix pack	TS4131720				1700	2212	
S13 1700EA vent clip fix	TS1131751	265	18.5	20 - 26	1700	2212	223 13
C13 267 canopy clip fix	TS2132021	267	17	24	1700	2351	2862
S13 1700EA vent & C13 canopy clip fix pack	TS4131721				1700	2212	
S13 1700EA remote control	TS6131750	265	18.5	32.5*	1700	2212	
S13 2700EA vent screw fix	TS1132750	411	18.5	20 - 26	2700	4045	
C13 412 canopy screw fix	TS2134020	412	17	24	2700	4278	
S13 2700EA vent & C13 canopy screw fix pack	TS4132720				2700	4045	
S13 2700EA vent clip fix	TS1132751	411	18.5	20 - 26	2700	4045	173.5 20 173.5 13
C13 412 canopy clip fix	TS2134021	412	17	24	2700	4278	4438
S13 2700EA vent & C13 canopy clip fix pack	TS4132721				2700	4045	
GS13 4000 grille (2 off)	TS3134050	192	17	14	2700	4143	
S13 2700EA remote control	TS6132750	411	18.5	32.5*	2700	4045	

EA figures above and marked on vents are achieved when fitted to manufacturer's recommendations.

Tested in accordance with BS:EN 13141-1 (2004). See Titon fixing instructions for full details.

This product does feature some protrusion into the slot. If the recommended slot size has been cut then the protrusion will not affect fitting or claimed performance. Please contact us if you are using an existing slot which is different to that shown. Using a product without locators could affect the stability of the product in certain extreme conditions.

## Manufactured from

Vent – PBTP (UV Stable) & POM, Canopy – PVCu

## Recommended screws

C13 – 3.5mm (No.6) Pan Head or equivalent

S13 – No.7 or No.8 countersunk heads

## Standards

Tested in accordance with BS EN 13141-1:2004 (airflow, air leakage and weather tightness)

Acoustic performance tested in accordance with BS EN ISO20140-10:1992, BS EN ISO140-10:1991 and single figures to BS EN ISO717-1:1991

## Performance

(Full test details available on request)

Equivalent Area – see above

Free Area – see above

Air Leakage (m<sup>3</sup>/hr @ 50Pa)

1700EA version (screw fix) – 1.61

2700EA version (screw fix) – 2.61

Water Resistance (Pa) – 1700EA and 2700EA – 600 Pa

Acoustic D<sub>n,e,w</sub> (+/-) 2700EA version – vent open 33 (-1;0), vent closed 45 (-1,-2)

## Finishes


Suffix product code with:

-392 (white), -315 (brown), -496 (bright white), -662 (toffee)

Other colour options available. Please contact sales for details.

## More information

enquiries@titon.co.uk / 01206 713801

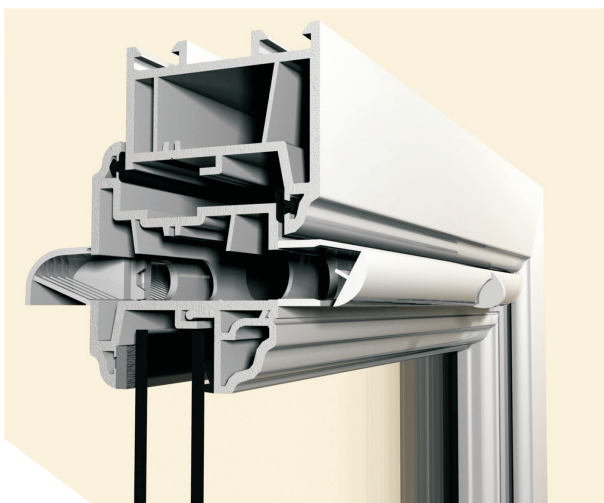

Through sash